



*The photo is showing MI-14301

General Description

Microdata Telecom's TMA provides network operators with a cost effective solution that delivers up to 50% improvement in uplink throughput while reducing dropped connections up to 20%.

The lower interference achieved with Microdata Telecom TMA shifts the traffic to higher coding schemes which further improves network performance and capacity.

The PIM buffer effect of Microdata Telecom TMAs will enable profitable use of spectrum previously avoided due to PIM contamination.

Features & Benefits

- Active LNA on all bands
- Market leading PIM performance (-160 dBc across the product portfolio)
- Efficiently prepare your sites for future expansions
- Fully utilize the capabilities of your ultra-wideband antennas
- Diplexed BTS Port that enable antenna and feeder sharing
- Small and light for minimum visual impact
- Reduce tower loading with up to 75%
- Full AISG operation and RET (Remote Electrical Tilt) antenna support

Specifications

Downlink (TX) Path	1800	2100
Frequency Band	1805 - 1880 MHz	2110 - 2170 MHz
Insertion Loss	< 0.65 dB	< 0.4 dB
Return Loss	≥ 18 dB	≥ 18 dB
Continuous Average Power	200 W (53 dBm)	200 W (53 dBm)
Intermodulation, 2x43 dBm TX Carrier BTS port	-117 dBm in RX band, ANT port	-125 dBm in RX band, ANT port
Uplink (RX) Path		
Frequency Band	1710 - 1785 MHz	1920 -1980 MHz
Gain	12 dB nominal	12 dB nominal
Return Loss	≥ 16 dB	≥ 16 dB
Noise Figure	1.4 dB*	1.3 dB*
Insertion Loss, Bypass mode	<2.7 dB	<2.5 dB
Return Loss, Bypass mode	≥ 12 dB	≥ 12 dB
Output IP3	25 dBm*	25 dBm*
Power Supply and Alarm		AISG - Mode
DC		24 V DC nominal (9-31 V DC)
Power		< 4 W
Alarm		3GPP/AISG 2.0
Environmental		
Operating Temperature Range	-40 to +65°C -40 to +149°F	
Operation	ETS 300 019-1-4 Class 4.1E	
Storage	ETS 300 019-1-1 Class 1.2	
Ingress Protection	IP67	
Lightning Protection	10 kA 8/20 μs (ANT, BTS) 5 kA common mode (RET port)	
Miscellaneous		
EMC	EN 301 489-8/-23	
Safety standards	EN 60950	
MTBF	1 Mh/TMA min.	
Mechanical		
Dimensions (WxHxD)	234X209X107 mm 9.21x8.23x4.21 in	
Connectors (See Selection Guide for specification)	4x ANT, 2xBTS, AISG f 8 pin circular	
Mounting (Supporter Pole Diameter: 40-140mm)	Hose clamps, arbitrary orientation	
Volume	5.2 l	
Weight gross / net	8.0 kg / 7.1 kg 17.64 lb / 15.65 lb	
Colour	NCS 1502-R	
Bracket	Included	
* typical		


Selection Guide

Model number	AISG		Connector (F)		
	Common Mode	Independent	7/16	4.3-10	AISG
MI-14301	X	ONETWO ¹	X		1x
MI-14302	X	TWOTWO ²	X		1x
MI-14306			X		2x
MI-14331	X	ONETWO ¹		X	1x
MI-14332	X	TWOTWO ²		X	1x
MI-14336				X	2x

¹ONETWO: the TMA is identified as 1 logic unit with 2 subunits each

²TWOTWO: the TMA is identified as 2 logic units with 2 subunits each

Block Diagram

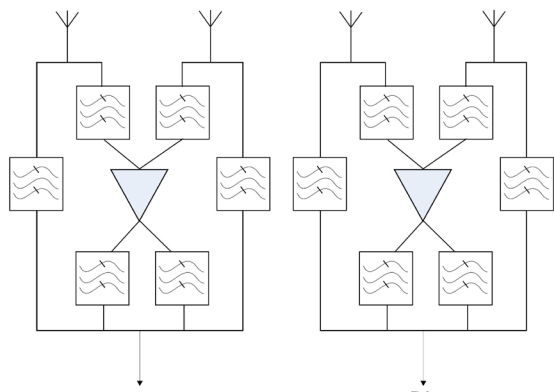

Mechanical Drawing

*The picture is showing MI-14306

