



MI-124nn TMA Twin AWS



General Description

Microdata Telecom's TMA provides network operators with a cost effective solution that delivers up to 50% improvement in uplink throughput while reducing dropped connections up to 20%.

The lower interference achieved with Microdata Telecom TMA shifts the traffic to higher coding schemes which further improves network performance and capacity.

The PIM buffer effect of Microdata Telecom TMAs will enable profitable use of spectrum previously avoided due to PIM contamination.


Features & Benefits

- Market leading PIM performance (-160 dBc across the product portfolio)
- Efficiently prepare your sites for future expansions
- Fully utilize the capabilities of your ultra-wideband antennas
- Small and light for minimum visual impact
- Reduce tower loading with up to 75%
- Full AISG operation and RET (Remote Electrical Tilt) antenna support

Specifications

Downlink (TX) Path		
Frequency Band	2110 - 2170 MHz	
Insertion Loss	0.3 dB*	
Continuous Average Power	200 W (53 dBm)	
Intermodulation, 2x43 dBm TX Carrier BTS port	-125 dBm in RX band, ANT port	
Uplink (RX) Path		
Frequency Band	1710 - 1770 MHz	
Gain	12 dB nominal	
Noise Figure	1.3 dB*	
Insertion Loss, Bypass mode	2.0 dB*	
Output IP3	25 dBm*	
Power Supply and Alarm		AISG - Mode
DC	9 - 15 V	9 - 30 V
Power	80 - 130 mA	< 2 W
Alarm	170 - 180 mA	3GPP/AISG 2.0
Environmental		
Operating Temperature Range	-40 to +65°C -40 to +149°F	
Operation	ETS 300 019-1-4 Class 4.1E	
Storage	ETS 300 019-1-1 Class 1.2	
Ingress Protection	IP67	
Miscellaneous		
EMC	EN 301 489-8	
Safety standards	EN 60950	
MTBF	1.2 Mh/TMA min.	
Mechanical		
Dimensions (WxHxD)	152x174x50 mm 5.98x6.85x1.97 in	
Connectors	7/16 f (MI-12401) 4.3-10 f (MI-12431)	
Mounting	Hose clamps, arbitrary orientation	
Volume	1.3 l	
Weight	2.5 kg 5.51 lb	
Colour	NCS 1502-R	
* typical		

Block Diagram

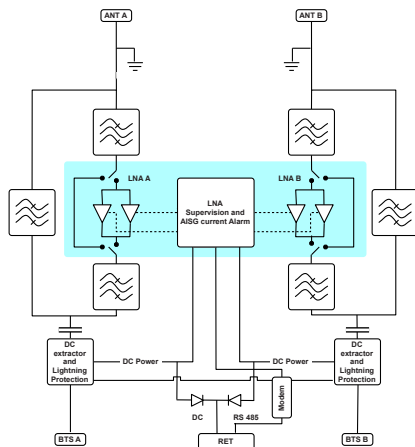

Mechanical Drawing

*To be added